

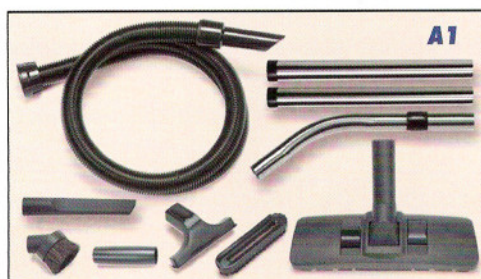


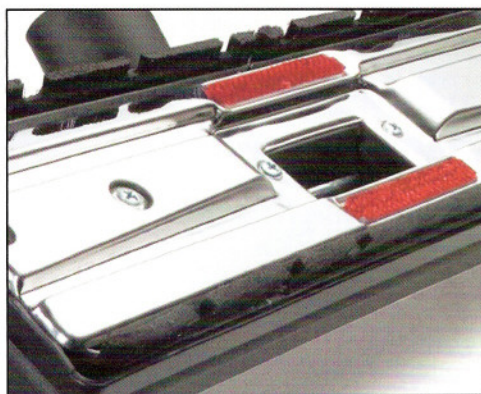

Hi-Lo

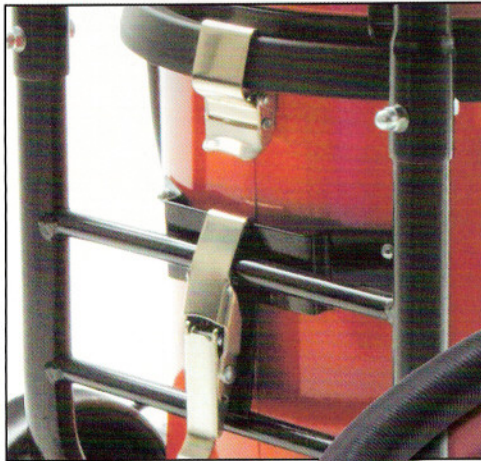

NQS350B-22

Not just tough... very tough, this is the model that proved itself to outlast the rest in the most arduous of applications.

The all-steel power head is low noise level; Twinflo' performance; Hi/Lo operation and, in every way, just about as good as you can get, even down to the Nucable plugged replaceable cable system and a standard blower facility.

Filtration is to our Tritex standard with the added advantage of giant Microflo' 15 litre dust bags, easy clean emptying.

The all-steel container is mounted on, but removable from, a rugged tubular chassis which really does give it go-anywhere mobility.

A full range of accessories to an equally high standard is supplied which can be upgraded from the standard 32mm (1 1/4") to 38mm (1 1/2") as required.



Motor	Power	Airflow	Suction	Capacity	Range	Weight	Dimensions
1200W	230V AC 50/60Hz	45 L/sec	2600mm	14L	26.8m	11.7Kgs	395 x 350 x 560mm

Our exclusive, easily applied happy face is supplied with each machine, one look tells you it really does make all the difference. Also available 115V/120V specification.

HELGE LØNHART A/S | Skovlunde Byvej 100 | 2740 Skovlunde | Tlf: 4494 7722 | www.lonhart.dk